


Spec Sheet STM410500750S

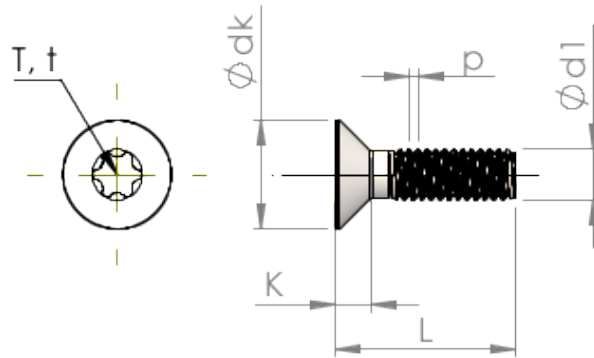

|                         |           |  |
|-------------------------|-----------|--|
| Item Number             |           | STM410500750S  |
| Standard                |           | ISO 14581  |
| Material                |           | steel, hardened  |
| Surface                 |           | zinc-plated 5-7 µm, baked, blue / transparent passivated |
| Thread Outside-Ø        | <b>d1</b> | 5.00 mm  |
| Thread Pitch            | <b>p</b>  | 0.80 mm  |
| Length                  | <b>L</b>  | 75.00 ±0.95 mm   |
| Head-Ø                  | <b>D</b>  | 9.30 <sub>-0.36</sub> mm                                 |
| Cylindrical Head Height | <b>C</b>  | 0.75 mm  |
| Size Six Lobe           |           | T25  |
| Penetration Depth       | <b>t</b>  | 1.12 - 1.51 mm   |
| Weight                  |           | 9.418 kg / 1000 pieces                                   |
| Customs Tariff No       |           | 73 181 595   |