


Spec Sheet STP31A0300070B

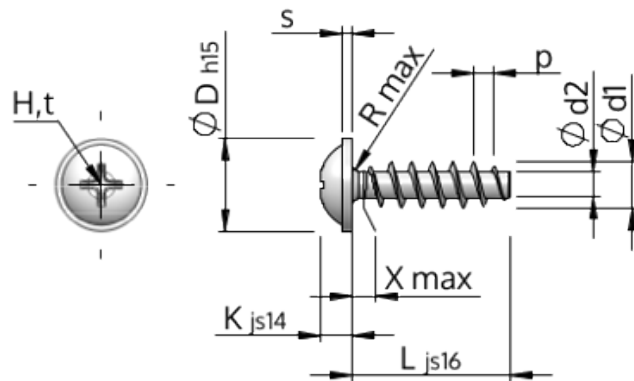

| | | |
|-------------------|-----------|--|
| Item Number | | STP31A0300070B |
| Standard | | KN1031 |
| Material | | steel, hardened |
| Surface | | Zinc-Nickel-plated min. 5µm, passivated black/ Cr-VI-free, baked, sealed |
| Thread Outside-Ø | d1 | 3.00 ^{+0.14} mm |
| Thread Core-Ø | d2 | 1.66 mm |
| Thread Pitch | p | 1.34 mm |
| Length | L | 7.00 ±0.45 mm |
| Head-Ø | D | 6.00 _{-0.30} mm |
| Head Height | K | 2.100 ±0.125 mm |
| Flange Thickness | S | 0.70 mm |
| Thread Run-Out | X | 1.50 mm |
| Radius | R | 0.35 mm |
| Size Cross Recess | | H1 |
| Penetration Depth | t | 1.15 - 1.61 mm |
| Thread | | STS |
| Weight | | 0.427 kg / 1000 pieces |
| Customs Tariff No | | 73 181 499 |