


Spec Sheet STP38A0250250S

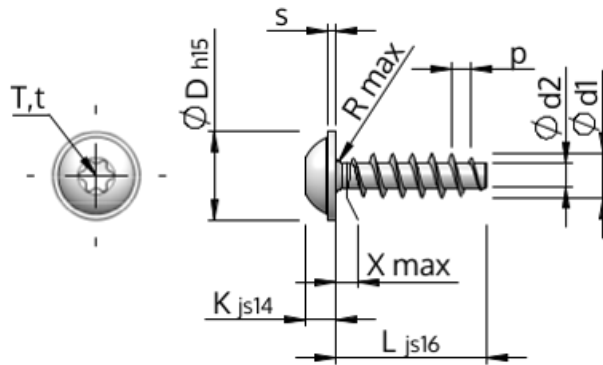

| | | |
|-------------------|-----------|--|
| Item Number | | STP38A0250250S |
| Standard | | KN1038 |
| Material | | steel, hardened |
| Surface | | zinc-plated 5-7 µm, baked, blue / transparent passivated |
| Thread Outside-Ø | d1 | 2.50 ^{+0.14} mm |
| Thread Core-Ø | d2 | 1.40 mm |
| Thread Pitch | p | 1.12 mm |
| Length | L | 25.00 ±0.65 mm |
| Head-Ø | D | 5.00 _{-0.48} mm |
| Head Height | K | 1.500 ±0.125 mm |
| Flange Thickness | S | 0.50 mm |
| Thread Run-Out | X | 1.30 mm |
| Radius | R | 0.30 mm |
| Size Six Lobe | | T6 |
| Penetration Depth | t | 0.75 - 0.90 mm |
| Thread | | STS |
| Weight | | 0.620 kg / 1000 pieces |
| Customs Tariff No | | 73 181 499 |