


Spec Sheet STP39A0220100E

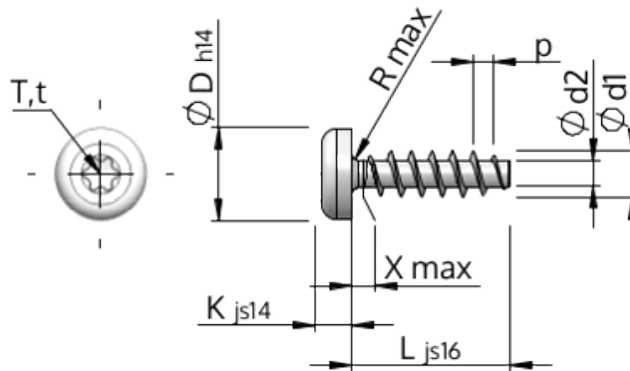

| | | |
|-------------------|-----------|--------------------------------|
| Item Number | | STP39A0220100E |
| Standard | | KN1039 |
| Material | | stainless-steel A2 |
| Surface | | bright, pickled and passivated |
| Thread Outside-Ø | d1 | 2.20 ^{+0.14} mm |
| Thread Core-Ø | d2 | 1.25 mm |
| Thread Pitch | p | 0.98 mm |
| Length | L | 10.00 ±0.45 mm |
| Head-Ø | D | 4.00 _{-0.30} mm |
| Head Height | K | 1.500 ±0.125 mm |
| Thread Run-Out | X | 1.10 mm |
| Radius | R | 0.25 mm |
| Size Six Lobe | | T6 |
| Penetration Depth | t | 0.55 - 0.80 mm |
| Thread | | STS |
| Weight | | 0.266 kg / 1000 pieces |
| Customs Tariff No | | 73 181 410 |