


Spec Sheet STP39A0300150B

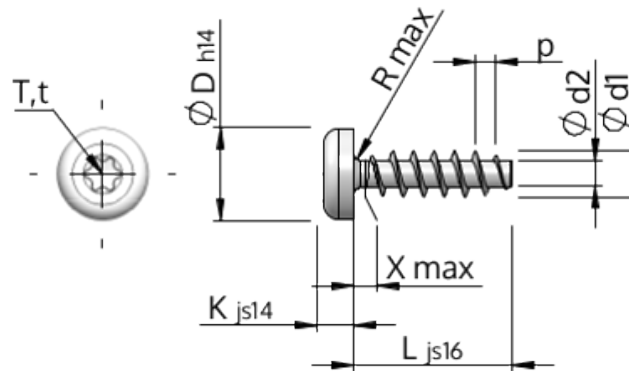

|                   |           |  |
|-------------------|-----------|--|
| Item Number       |           | STP39A0300150B   |
| Standard          |           | WN1452   |
| Material          |           | steel, hardened  |
| Surface           |           | Zinc-Nickel-plated min. 5µm, passivated black/ Cr-VI-free, baked, sealed |
| Thread Outside-Ø  | <b>d1</b> | 3.00 <sup>+0.14</sup> mm   |
| Thread Core-Ø     | <b>d2</b> | 1.66 mm  |
| Thread Pitch      | <b>p</b>  | 1.34 mm  |
| Length            | <b>L</b>  | 15.00 ±0.55 mm   |
| Head-Ø            | <b>D</b>  | 5.60 <sub>-0.30</sub> mm   |
| Head Height       | <b>K</b>  | 2.100 ±0.125 mm  |
| Thread Run-Out    | <b>X</b>  | 1.50 mm  |
| Radius            | <b>R</b>  | 0.35 mm  |
| Size Six Lobe     |           | T10  |
| Penetration Depth | <b>t</b>  | 1.00 - 1.30 mm   |
| Thread            |           | STS  |
| Weight            |           | 0.703 kg / 1000 pieces   |
| Customs Tariff No |           | 73 181 499   |