


Spec Sheet STP41A0300120B

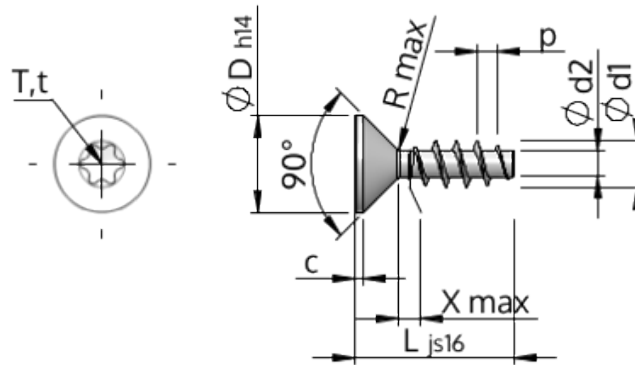

|                         |           |  |
|-------------------------|-----------|--|
| Item Number             |           | STP41A0300120B   |
| Standard                |           | KN1041   |
| Material                |           | steel, hardened  |
| Surface                 |           | Zinc-Nickel-plated min. 5µm, passivated black/ Cr-VI-free, baked, sealed |
| Thread Outside-Ø        | <b>d1</b> | 3.00 <sup>+0.14</sup> mm   |
| Thread Core-Ø           | <b>d2</b> | 1.66 mm  |
| Thread Pitch            | <b>p</b>  | 1.34 mm  |
| Length                  | <b>L</b>  | 12.00 ±0.55 mm   |
| Head-Ø                  | <b>D</b>  | 5.50 <sub>-0.30</sub> mm   |
| Cylindrical Head Height | <b>C</b>  | 0.55 mm  |
| Thread Run-Out          | <b>X</b>  | 1.50 mm  |
| Radius                  | <b>R</b>  | 0.35 mm  |
| Size Six Lobe           |           | T8   |
| Penetration Depth       | <b>t</b>  | 0.80 - 1.00 mm   |
| Thread                  |           | STS  |
| Weight                  |           | 0.437 kg / 1000 pieces   |
| Customs Tariff No       |           | 73 181 499   |